


NeionPlus Intelligent Toilet

Installation Manual
NE043200

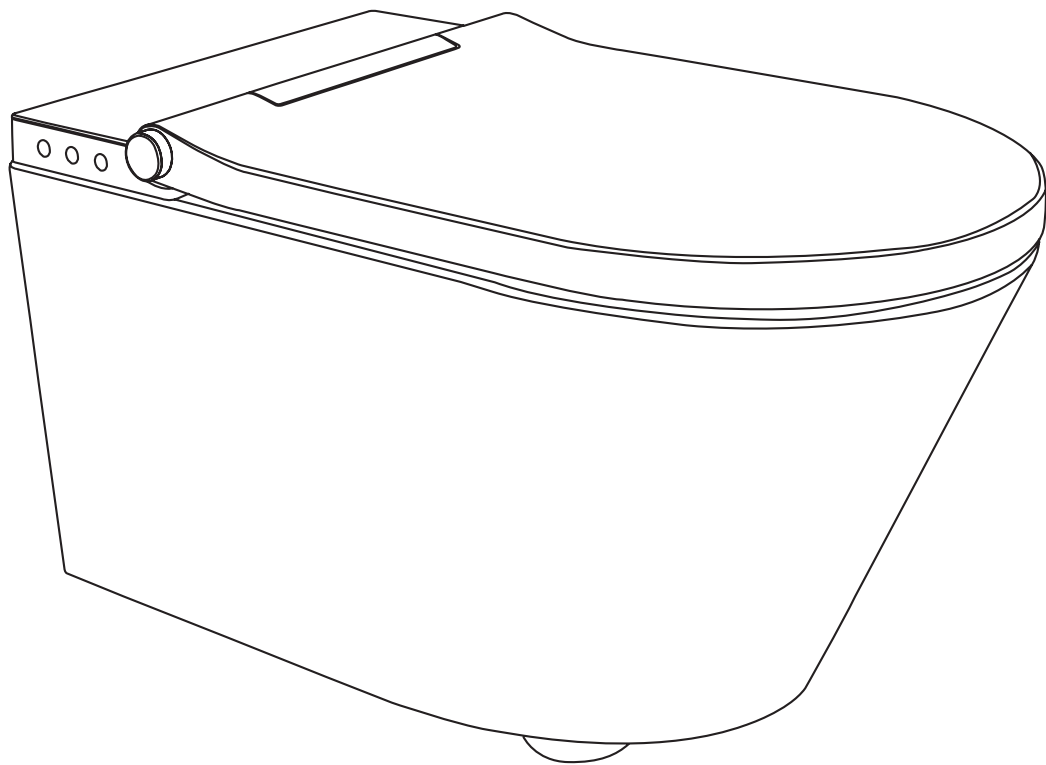

ARCISAN

Contents

03 Safety and Installation precautions

04 Bill of material

05 Electrical Requirements/Installation

06 Water and electrical points

07 Installation

10 Remote Installation



The supplier shall not be liable for any loss arising from the failure to comply with the following regulations.

1. This equipment is “I” type electrical appliance, it must be connected to the earth system.
2. This equipment is an electric appliance and should not be installed in a place where it can easily be splashed with water or exposed to high temperatures. Please install an exhaust fan or ventilation opening within the area to ensure adequate ventilation.
3. If the supply cord is damaged, it must be replaced by the manufacturer, service agent, or similarly qualified person in order to avoid hazards.

ARCISAN

CE

Model: NE043200

Power: 220-240VAC, 50Hz/60Hz, 1250W

Water Pressure: 250 kpa - 500kPa

Waterproof Rating: IPX4

Technical information	
Power Supply	AC220 - 240, 50-60Hz
Power wattage	1250W
IP Rating	IPX4
Note: All electrical work connected to this product must be installed by a qualified person, in accordance to AS/NZS 3000 Wiring Rules.	
Certification	
WaterMark	AS1172.1 / AS1172.2 Certificate no: WM-022911
WELS	4 star 3 / 4.5L
RCM	

Safety Precautions

Please read this manual carefully before using and installing the product and keep it for future reference. Negligence or incorrect use of this product can lead to serious injury.

The NeionPlus intelligent toilet should not be used by individuals (including children) who lack the experience or knowledge to use it, unless they are monitored by a responsible person or receive instructions on how to use it for their own safety. Children should not play with the device.

When using electronic devices, basic safety measures should be followed. Please see more specifics listed below.

Explanation of Symbols



Refers to a potentially dangerous situation that may result in serious injury or death.



Refers to a potentially dangerous situation that may cause injury or property loss.



Refers to DO NOT perform actions.



Refers to adhere to the rules.

Installation Precautions

This product should only be installed by a qualified person and with provided components. Check the installation manual for more installation particulars.




Follow the below precautions prior to installation:


1. Always connect the NeionPlus Intelligent toilet to domestic cold water mains.
2. Rain water and gray water is not suitable to operate the NeionPlus Intelligent toilet. This should only be operated with normal drinking water.
3. Flush water outlet pipe before connecting to any fittings.
4. When installing the water filter, ensure it is installed in its correct position and tightened.
5. The recommended water supply pressure of 250kpa to 500kpa. Operate equipment within the recommended water pressure.
6. Ensure the product is correctly earthed to ground.
7. This product installation must comply to AS/NZS 3500.
8. Please check with your local council to ensure that all local council requirements are adhered to.

This product complies to AS/NZS3500.1:2018 therefore a back flow prevention device (ie. RPZ valve) is not required.


Bill of materials

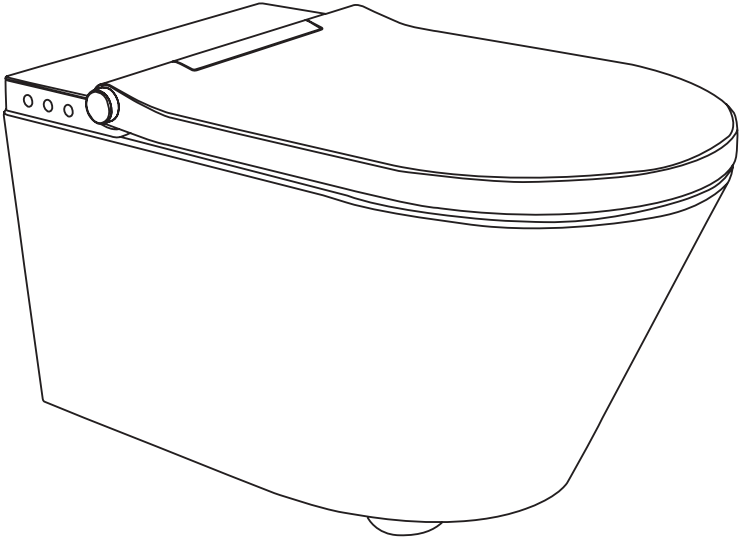

NeionPlus pan + seat

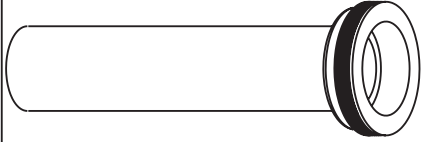

Outlet pipe



Electrical connector




Installation Instructions




User instructions


Installation + User manuals




Inlet hose



Cushion




Ball valve




Pan fixing bolts

Horizontal mounted remote control



Wall plugs + screws



Backplate



Bracket



Remote control

 Caution | Remote Control Installation


Ensure the toilet is installed before the remote control is installed.

Electrical Requirements



MUST BE ADHERED

1. The electrical components of the NeionPlus Intelligent Toilet must be protected by a 25A RCD and a 10A magnothermic switch. Both switches MUST be placed outside of the bathroom.
2. A fixed power connection must be connected by a dedicated flexible power cable consisting of 3 wires (active, neutral and earth) of a least 1mm². The connection must be done inside an IPX4 or better junction box. If it is necessary to replace the power cable, this must be completed by a qualified person.

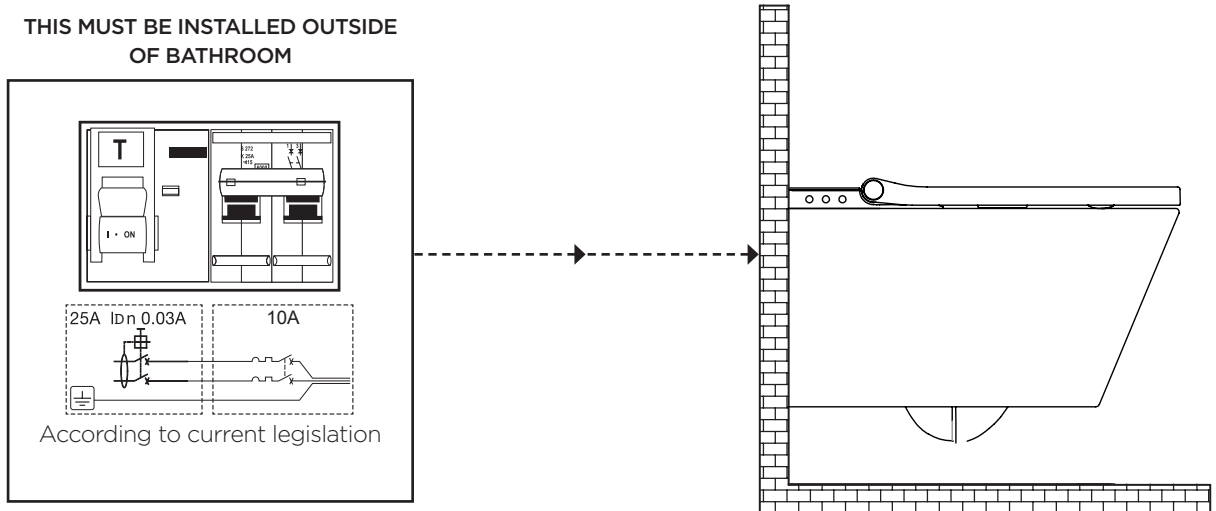


NOTE: Any electrical work conducted on this product must be installed by a qualified person in accordance with AS/NZ 3000 Wiring Rules.

Please consult with a qualified electrician to confirm an appropriate installation location.

No additional electrical equipment should be fitted inside the WC.


This product (IPX4) shall not be exposed to water jets for cleaning purposes.

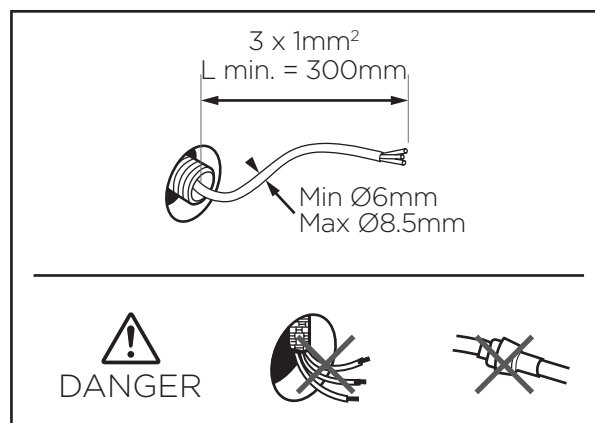









1. The toilet installation area should be equipped with intake pipes.
2. The toilet installtion area should be equipped with power cord.


















1-1

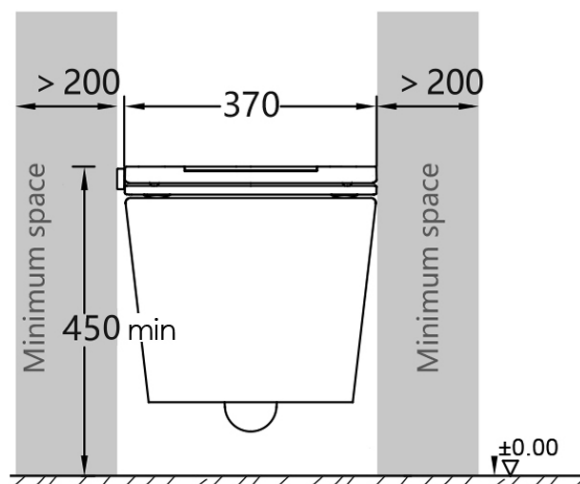

Installation

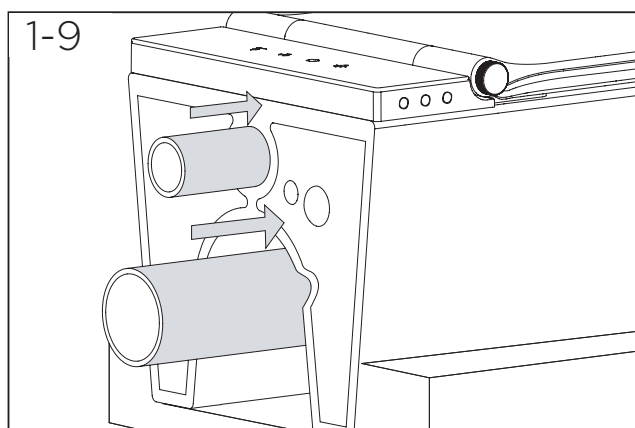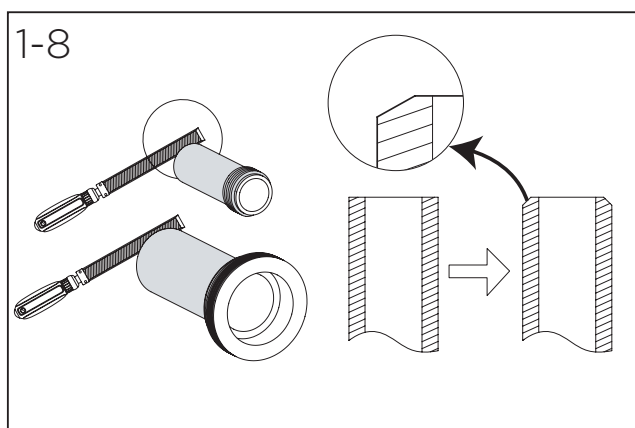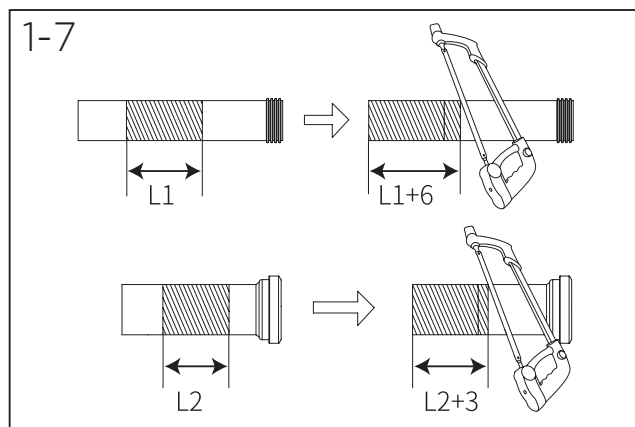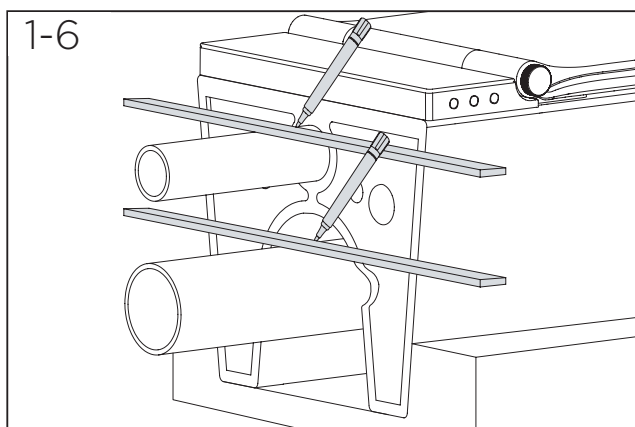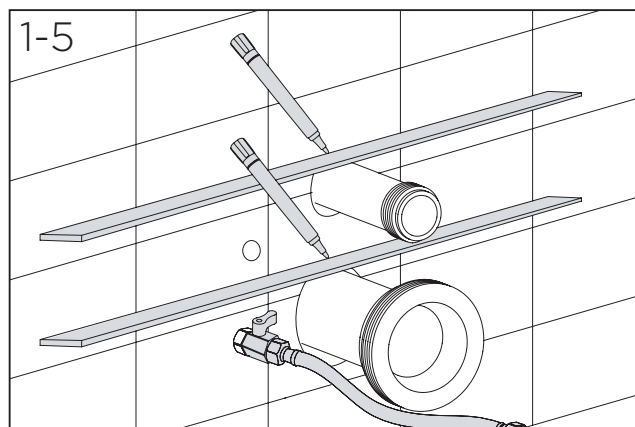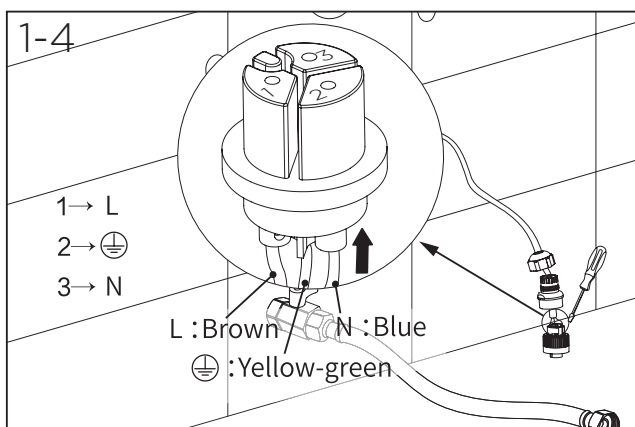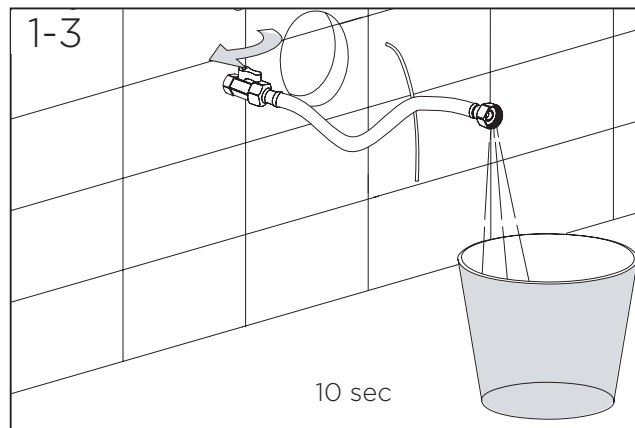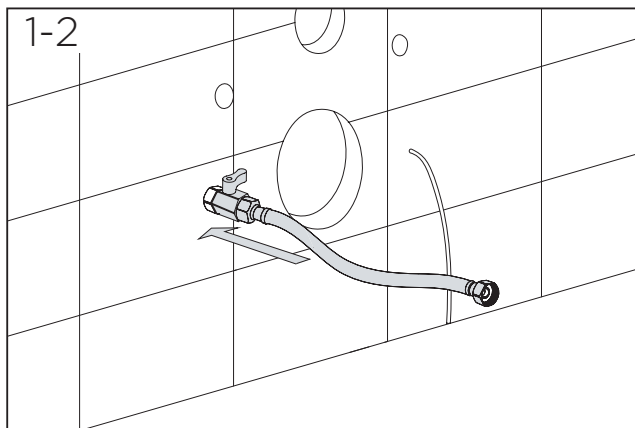

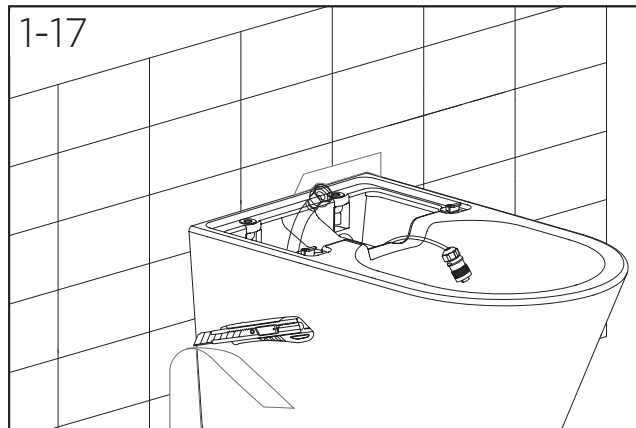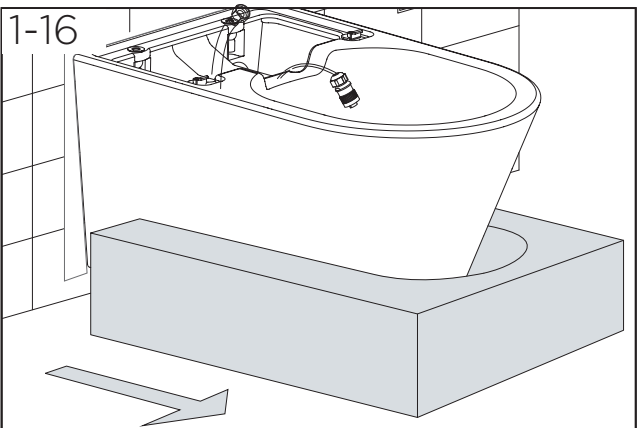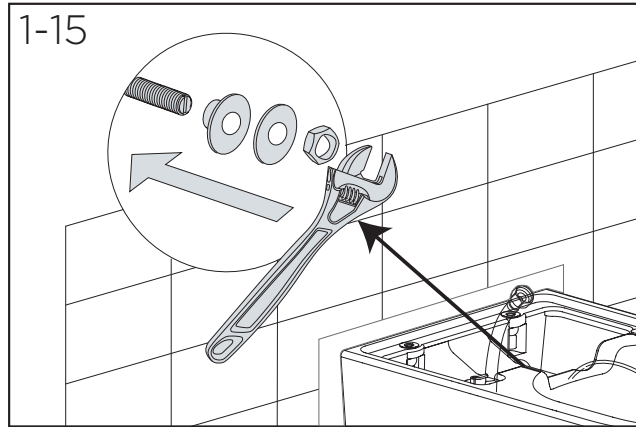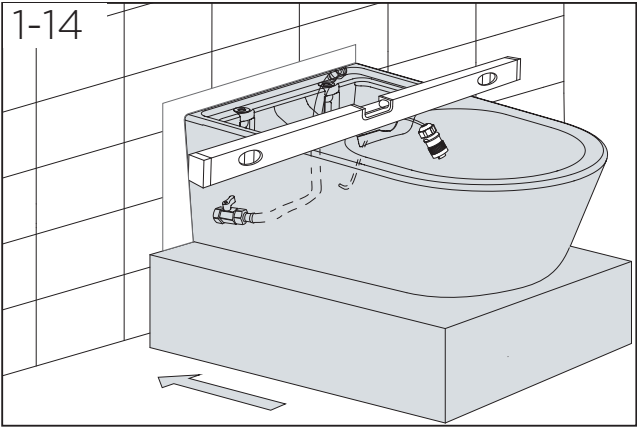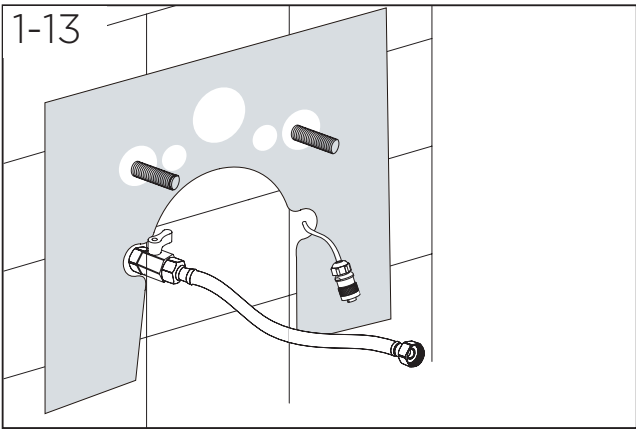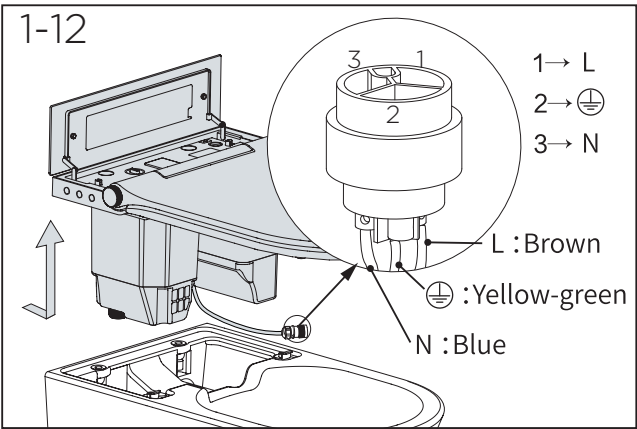
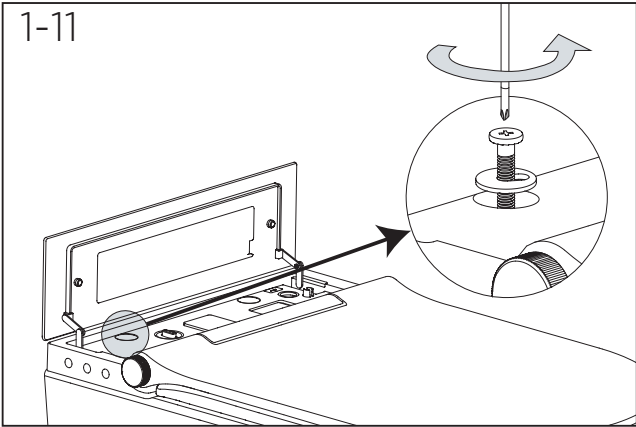
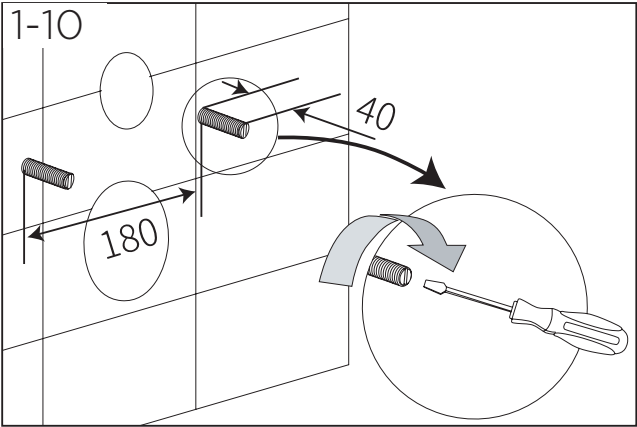


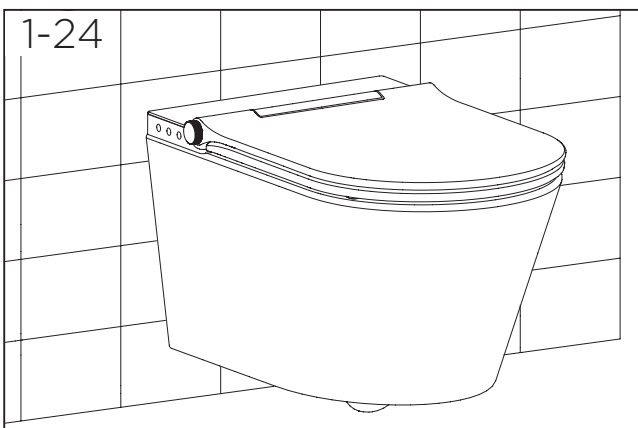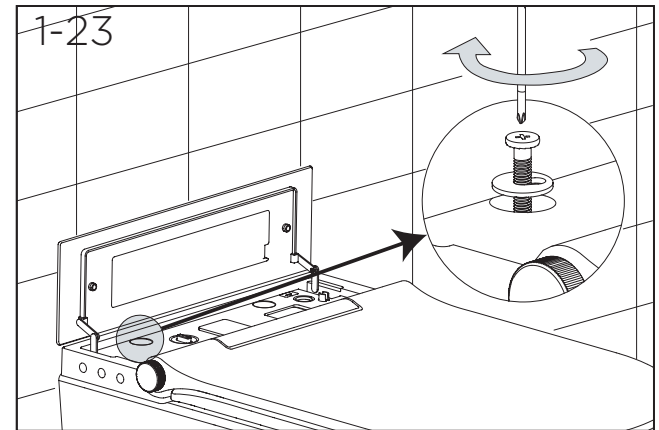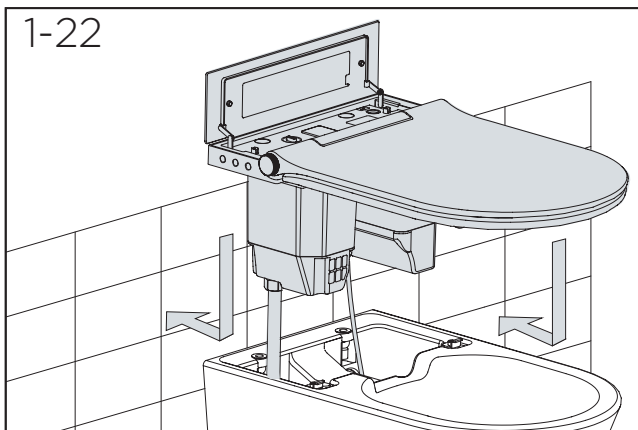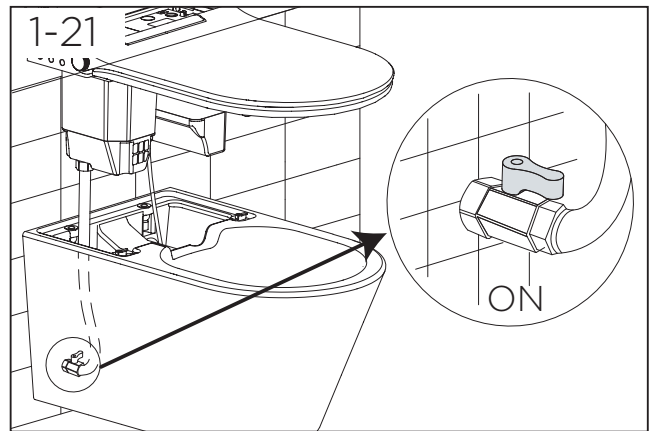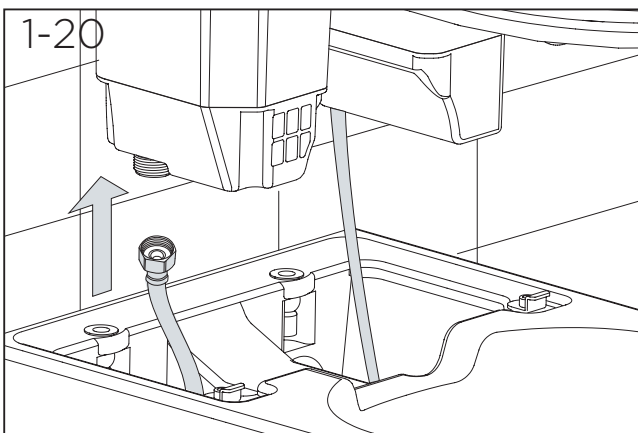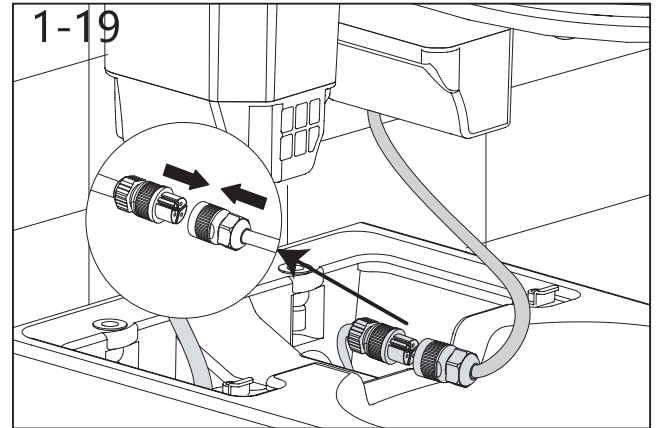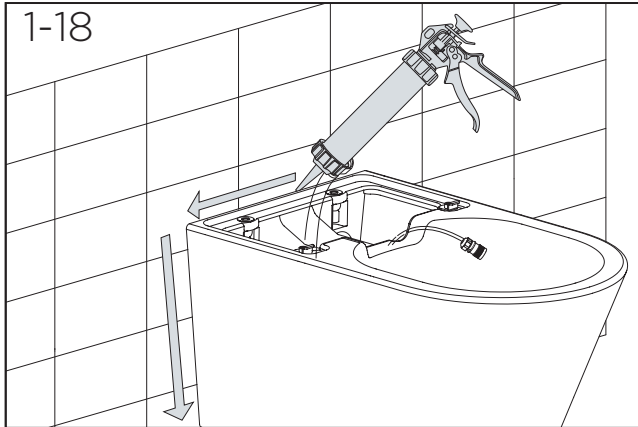

Remote Installation

Horizontal Remote Installation

** Recommended measurements*

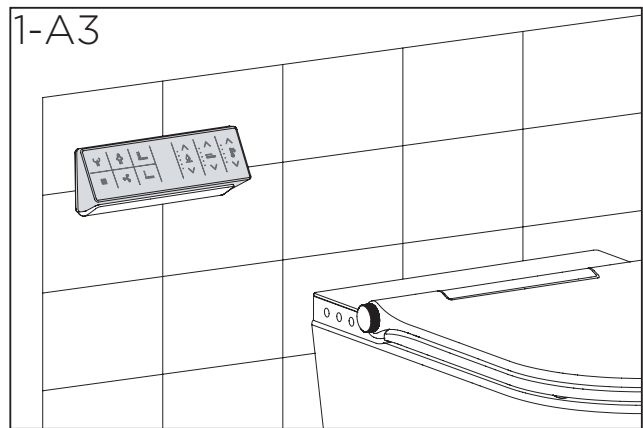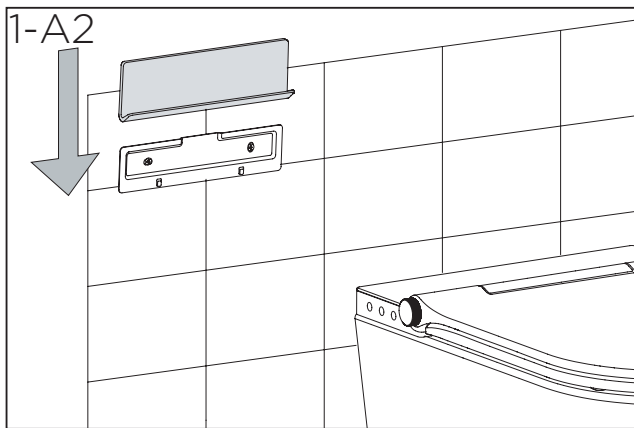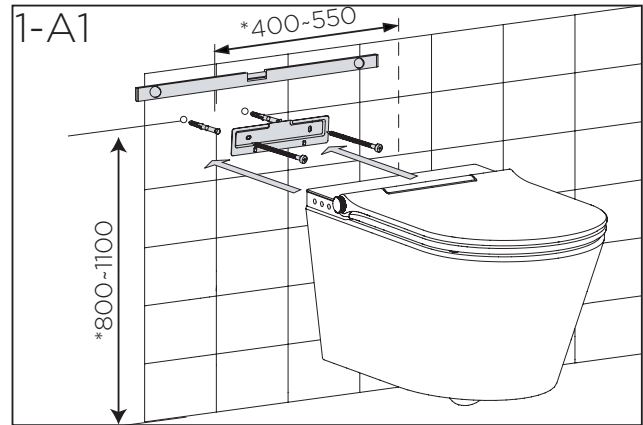

ARCISAN

Streamline Products Pty Ltd

21 Compark Circuit, MULGRAVE, Victoria 3170

Ph: 1300 735 352 | customerservice@streamlineproducts.com.au

www.streamlineproducts.com.au