


CLASSIC DUO OVAL FREESTANDING

- Pure simplicity and unpretentious elegance are what distinguish these baths
- Bathing with a friend: two identical back rests and centrally positioned waste
- The moulded panel emphasises the high design standard and enables the bath to be free-standing
- Made of KALDEWEI steel enamel



Similar illustration

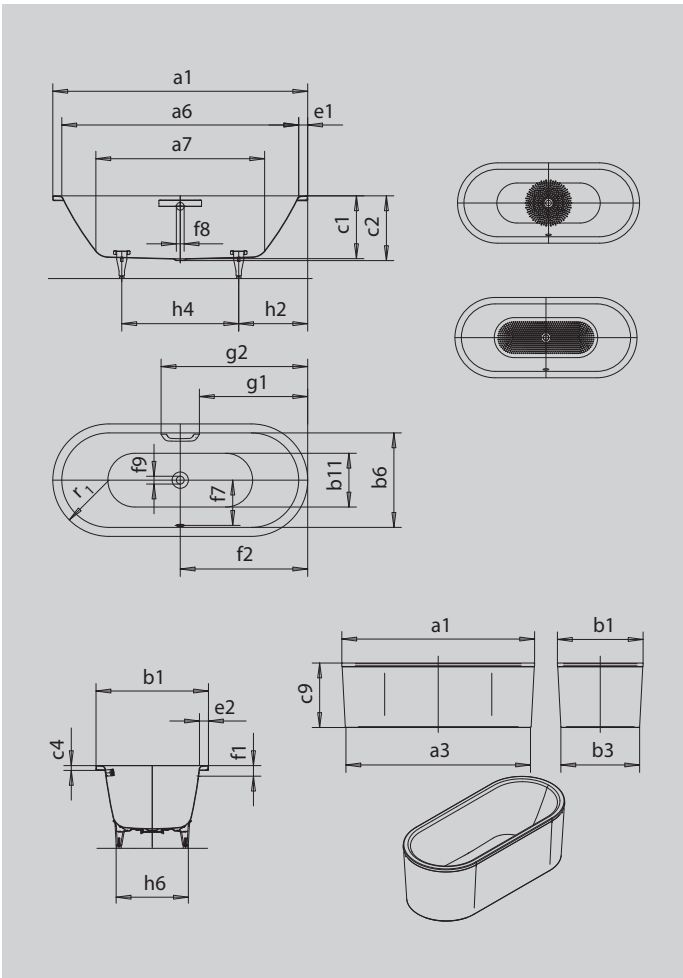

GRIP DISCREET OPULENCE



INVISIBLE
GRIP

WHIRL

SOUND
WAVE

Model		111-7
External length [mm]	a ₁	1800 mm
External length (bottom) [mm]	a ₃	1735 mm
Internal length (top) [mm]	a ₆	1680 mm
Internal length (bottom) [mm]	a ₇	1230 mm
External width [mm]	b ₁	800 mm
External width (bottom) [mm]	b ₃	735 mm
Internal width (top) [mm]	b ₆	680 mm
Internal width (bottom) [mm]	b ₁₁	550 mm
Depth inside [mm]	c ₁	420 mm
Depth incl. waste hole [mm]	c ₂	430 mm
Height of rim [mm]	c ₄	32 mm
Overall height with panel [mm]	c ₉	602 mm
Width of rim (foot end; long side) [mm]	e ₁ ; e ₂	60; 60 mm
Distance top edge to centre of overflow hole [mm]	f ₁	70 mm
Distance bath edge to centre of waste hole [mm]	f ₂	900 mm
Distance centre of waste hole to centre of overflow hole [mm]	f ₇	330 mm
Diameter of overflow hole [mm]	f ₈	Ø 52 mm
Diameter of waste hole [mm]	f ₉	Ø 52 mm
Distance bath edge (foot end) to start of grip [mm]	g ₁	772 mm
Distance bath edge (foot end) to end of grip [mm]	g ₂	1028 mm
Distance foot end of bath edge to centre of foot [mm]	h ₂	600 mm
Distance between the feet [mm]	h ₄	600 mm
Width of feet max. [mm]	h ₆	540 mm
External radius [mm]	r ₁	400 mm
Water volume [l]		158 l
Net weight [kg]		88 kg
Diameter of anti-slip [mm]		Ø 435 mm
Full anti-slip		900 x 300 mm

Subject to technical alterations, tolerances and errors. Similar illustration. 70 litres displacement on average.