


CONODUO FREESTANDING

- Straight-lined, purist design
- Enamelled waste cover and overflow knob integrated in the bath design (also available with filling function)
- Classic four-cornered model
- The moulded panel emphasises the high design standard and enables the bath to be free-standing
- Bathing with a friend: two identical back rests and centrally positioned waste
- Made of KALDEWEI steel enamel
- Designed by Sottsass Associati



Similar illustration

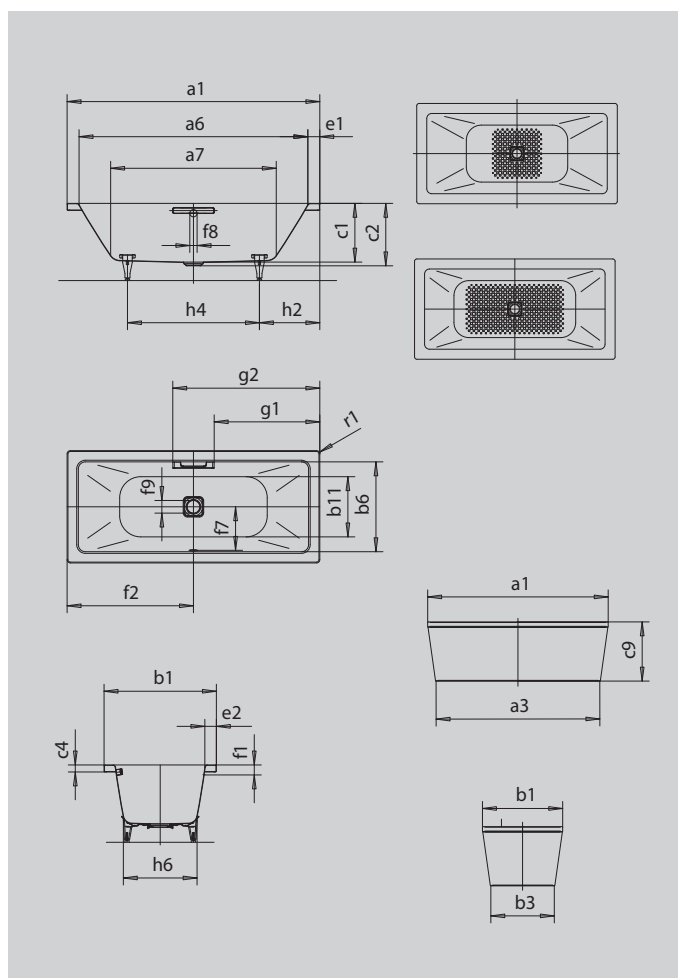

Model		735-7
External length [mm]	a ₁	2000 mm
External length (bottom) [mm]	a ₃	1833 mm
Internal length (top) [mm]	a ₆	1800 mm
Internal length (bottom) [mm]	a ₇	1340 mm
External width [mm]	b ₁	1000 mm
External width (bottom) [mm]	b ₃	833 mm
Internal width (top) [mm]	b ₆	800 mm
Internal width (bottom) [mm]	b ₁₁	680 mm
Depth inside [mm]	c ₁	420 mm
Depth incl. waste hole [mm]	c ₂	445 mm
Height of rim [mm]	c ₄	50 mm
Overall height with panel [mm]	c ₉	590 mm
Width of rim (foot end; long side) [mm]	e ₁ ; e ₂	100; 100 mm
Distance top edge to centre of overflow hole [mm]	f ₁	70 mm
Distance bath edge to centre of waste hole [mm]	f ₂	1000 mm
Distance centre of waste hole to centre of overflow hole [mm]	f ₇	390 mm
Diameter of overflow hole [mm]	f ₈	Ø 52 mm
Diameter of waste hole [mm]	f ₉	Ø 90 mm
Distance bath edge (foot end) to start of grip [mm]	g ₁	852 mm
Distance bath edge (foot end) to end of grip [mm]	g ₂	1148 mm
Distance foot end of bath edge to centre of foot [mm]	h ₂	620 mm
Distance between the feet [mm]	h ₄	760 mm
Width of feet max. [mm]	h ₆	675 mm
External radius [mm]	r ₁	23 mm
Water volume [l]		260 l
Net weight [kg]		112 kg
Anti-slip		500 x 500 mm
Full anti-slip		980 x 500 mm

Subject to technical alterations, tolerances and errors. Similar illustration. 70 litres displacement on average.